

# MT3K-HF

## FULL FLOW FILTER - INSTALLATION SHEET

### PARTS INCLUDED:

FILTER  
HEAD  
W/ BRACKET




FILTER  
CARTRIDGE  
(MT3K-HF/RFC)




3/8" x 3/8"  
BRASS ADAPTER  
(x2)



20" BRAIDED HOSE



#12 x 5/8"  
PHILLIPS SCREWS (x2)

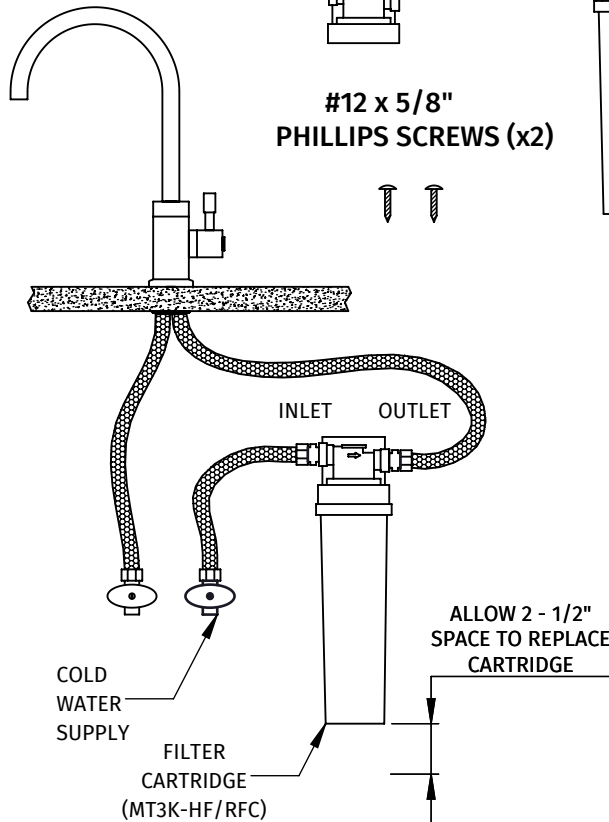

### Specifications:

- Flow Rate: 1.67 GPM (6.3 LPM)
- Pressure: 10-125 psi (0.7-8.6 bar) non-shock
- Temperature: 35-100 °F (2-38 °C)
- Cold water use only
- Capacity: 3000 gal (11,356 L)
- Installation shall comply with applicable state and local regulations

### Installation Instructions:

1. SHUT OFF THE COLD WATER SUPPLY AND OPEN THE COLD WATER SIDE OF KITCHEN FAUCET TO RELIEVE PRESSURE.
2. UNSCREW THE COLD WATER INLET HOSE FROM THE STOP.
3. APPLY TEFLON TAPE TO MALE THREADS ON BRASS ADAPTERS AND SCREW INTO FILTER HEAD. TIGHTEN HAND TIGHT PLUS ONE FULL TURN ONLY. **OVER TIGHTENING THE BRASS ADAPTERS CAN CRACK THE FILTER HEAD AND CAUSE LEAKS!**
4. CONNECT THE COLD WATER SUPPLY LINE FROM THE FAUCET TO THE OUTLET OF THE FILTER HEAD.
5. CHOOSE AN INSTALLATION LOCATION WHERE THE TUBING CAN BE ATTACHED WITHOUT KINKING. IDEALLY, ALLOW AT LEAST 2" OF CLEARANCE UNDERNEATH THE FILTER IN ORDER TO REMOVE DURING FILTER REPLACEMENT.
6. SCREW THE FILTER HEAD INTO THE WALL USING THE INCLUDED 3/4" SCREWS. ENSURE THAT THE FILTER HEAD IS ATTACHED SECURELY.
7. CONNECT THE INCLUDED SUPPLY LINE TO THE COLD WATER SUPPLY VALVE AND TO THE INLET OF THE FILTER HEAD. **DO NOT CONNECT THIS FILTER TO THE HOT WATER SUPPLY.**
8. TO INSTALL THE QUICK-CHANGE CARTRIDGE, PRESS THE CONNECTOR UP INTO THE FILTER HEAD FIRMLY AND TWIST THE FILTER CARTRIDGE COUNTER CLOCKWISE UNTIL IT SNAPS INTO PLACE.
9. VERIFY ALL HOSES ARE SECURED TIGHTLY. CLOSE THE TAP, THEN OPEN THE COLD WATER SUPPLY SLOWLY, ALLOWING THE SYSTEM TO PRESSURIZE.
10. OPEN THE TAP SLOWLY ALLOWING THE FILTER TO FILL COMPLETELY. CHECK FOR LEAKS.
11. RUN WATER FOR 5-10 MINUTES TO FLUSH AND PREPARE FILTER.
12. TO REPLACE CARTRIDGE, REPEAT STEP 1, THEN TWIST FILTER CARTRIDGE CLOCKWISE TO REMOVE. REPEAT STEPS 8-11.



#### Features & Benefits

System tested and Certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of:

#### Standard No. 42 Aesthetic Effect:

*Chemical Reduction*  
Taste & Odor  
Chlorine  
*Mechanical Filtration*

#### Standard No. 53 Health Effects:

*Chemical Reduction*  
Lead  
*Mechanical Filtration*  
Cyst

ELF1MP

### WARRANTY

FOR WARRANTY INFO PLEASE VISIT [WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY](http://WWW.MOUNTAINPLUMBING.COM/PAGE/RESOURCES/WARRANTY)

### FINISH CARE & MAINTENANCE

NEVER USE ANY HARSH ALKALI, ACID BASED DETERGENTS OR CLEANERS SUCH AS SOFT SCRUB®, SCRUBBING BUBBLES® OR COMET® TO CLEAN. DO NOT USE BRILLO® OR SCOTCH BRITE® PADS. THESE WILL ALL HARM THE FINISH. TO CLEAN, USE ONLY A DAMP SOFT CLOTH AND WIPE GENTLY. STANDARD WINDEX® CAN ALSO BE USED SPARINGLY. IT IS NOT NECESSARY TO WIPE HARD TO REMOVE SPOTS. TO MAINTAIN THE FINISH, WIPE WITH A SOFT DRY CLOTH AFTER USE. AN OCCASIONAL COAT OF PURE CARNAUBA WAX WITHOUT CLEANERS WILL HELP PROTECT THE FINISH.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
[www.mountainplumbing.com](http://www.mountainplumbing.com) 888-222-9140 fax 972-456-2719

MANUFACTURED BY OMNIPURE FILTER COMPANY, INC.  
1904 INDUSTRIAL WAY, CALDWELL, ID 83605